



## DTB...

Differential pressure transmitter for air and non-corrosive gases

*Compact differential pressure transmitter with automated zero-point adjustment and display*

- ✓ 0...10 V / 4...20 mA output signal
- ✓ LED display
- ✓ Different pressure ranges
- ✓ Protection class IP54

## APPLICATION

The differential pressure transmitter is used in building automation to monitor pressure in air and other non-corrosive gases. Three different models are available for an optimal adaptation to the application. All models are equipped with a LED display which makes it easy to read out the pressure value.

## FUNCTION

The transmitter regularly performs automatic zero-point adjustments, which means that no manual calibration is needed. This reduces monitoring and maintenance efforts. The differential pressure transmitter is stable and accurate over time.

Jumpers are available for changing the output signal and its response time as well as selecting the pressure range (on models where this is possible).

## INSTALLATION

The unit can be mounted in any position as the automatic calibration eliminates any position error.

### HEAD OFFICE SWEDEN

Phone: +46 31 720 02 00  
Web: [www.regincontrols.com](http://www.regincontrols.com)  
E-mail: [info@regincontrols.com](mailto:info@regincontrols.com)

DTB...

— | —

**REGIN**  
THE CHALLENGER

## TECHNICAL DATA

|                              |                                          |
|------------------------------|------------------------------------------|
| Supply voltage               | 24 V AC/DC (18...30 V AC/DC)             |
| Output signal                | 0...10 V / 4...20 mA                     |
| Display                      | Yes                                      |
| Display type                 | LED, 4 digits                            |
| Sensor element, pressure     | Piezo-resistive pressure sensor          |
| Accuracy, pressure           | ±1 % full scale, min. ±1 Pa              |
| Power consumption            | < 6 W                                    |
| Load impedance, 4...20 mA    | 20...500 Ω                               |
| Load impedance, 0...10 V     | ≥ 1 kΩ                                   |
| Protection class             | IP54                                     |
| Ambient humidity             | 0...95 % RH (non-condensing)             |
| Ambient temperature          | -10...+50 °C                             |
| Response time                | 100 ms / 1 s                             |
| Storage temperature          | -10...+50 °C                             |
| Media                        | Air and non-corrosive gases              |
| Zero-point adjustment        | Automatic                                |
| Cable connection             | Screw terminals max. 1.5 mm <sup>2</sup> |
| Cable gland                  | M16                                      |
| Pressure connection          | Connection pipes for 6 mm tube           |
| Mounting                     | Wall                                     |
| Dimensions, external (WxHxD) | 85 x 85 x 58 mm                          |
| Weight (incl. packaging)     | 0.18 kg                                  |



This product carries the CE-mark. More information is available at [www.regincontrols.com](http://www.regincontrols.com).

## MATERIAL

|                   |     |
|-------------------|-----|
| Material, housing | ABS |
|-------------------|-----|

## MODELS

| Article | Measuring range, pressure | Max. overload pressure |
|---------|---------------------------|------------------------|
| DTB5/5  | -50...+50 Pa              | 60 kPa                 |
| DTB125  | 0...100 Pa / 0...250 Pa   | 60 kPa                 |
| DTB510  | 0...500 Pa / 0...1000 Pa  | 75 kPa                 |

## ACCESSORIES

| Article | Description                                                  |
|---------|--------------------------------------------------------------|
| ANS-1   | 2 m plastic tube and two pressure outlets (cut 60°)          |
| ANS-3   | 2 m plastic tube and two pressure outlets (metal, 90° angle) |

HEAD OFFICE SWEDEN

Phone: +46 31 720 02 00


Web: [www.regincontrols.com](http://www.regincontrols.com)

E-mail: [info@regincontrols.com](mailto:info@regincontrols.com)

DTB...

| Article | Description                                     |
|---------|-------------------------------------------------|
| DBZ-14A | Set with mounting bracket and screws (S-shaped) |
| DBZ-14B | Set with mounting bracket and screws (L-shaped) |

## DIMENSIONS

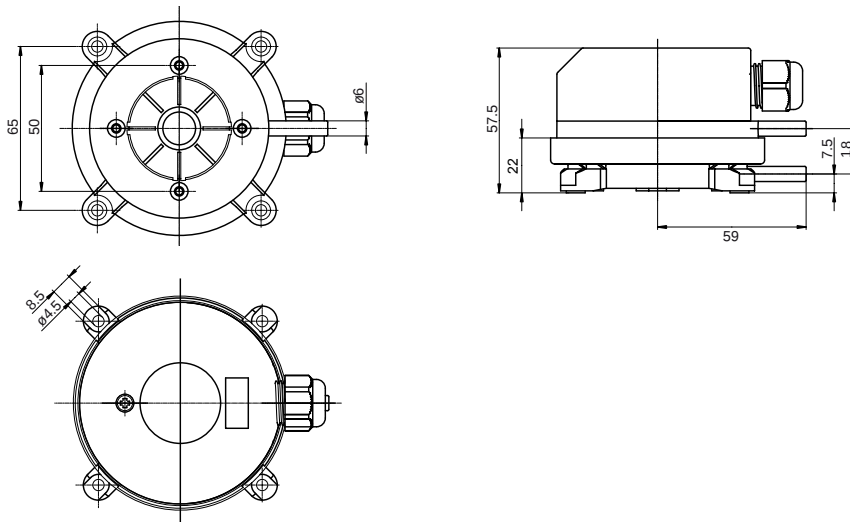

[mm]

## WIRING

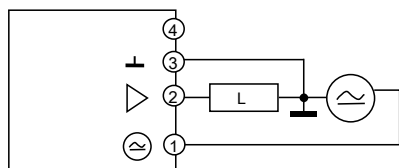


Fig. 1 Terminal assignments (L= Load)

| Terminal | Description    |
|----------|----------------|
| 4        | Not used       |
| 3        | Ground GND     |
| 2        | Output signal  |
| 1        | Supply voltage |

## DOCUMENTATION

All documentation can be downloaded from [www.regincontrols.com](http://www.regincontrols.com).